


Chronograph Stopwatch OS60

(1 crown/2 pushers)

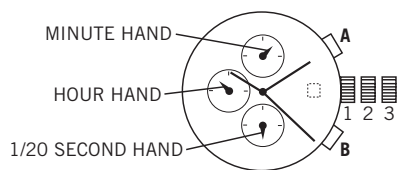

Time Setting

1. Pull crown out to position 3. Chronograph second hand and 1/20 second hand will return to "0."
NOTE: Do not return the crown to position 1 while the hands are returning to "0," or else the position the hands are at when this is done will be recognized as the new "0" position.
2. Turn crown to set the desired time.
3. Return crown to position 1.

Date Setting

1. Pull crown out to position 2.
2. Turn crown counter-clockwise until the correct date is shown in the date window.
3. Return crown to position 1.

Chronograph Zero Reset

1. Pull crown out to position 3. Chronograph second hand and 1/20 second hand will return to "0."
Do not return the crown to position 1 while the hands are returning to "0." Doing so will cause the position of the hands to be recognized as the new "0" position.
2. Press A to set the chronograph second hand to the "0" position.
3. Press B to set the chronograph 1/20 second hand to "0" position.
NOTE: The hands move quickly if the pushers are kept pressed.
4. Return crown to position 1.
5. Press B to reset all hands to the "0" position.

Chronograph Operation

1. Press A to start/stop the chronograph.
2. Press B to reset the chronograph.
3. When the measured time is over 30 seconds, the 1/20 second hand stops, however the watch continues measuring the elapsed time. The exact time elapsed is indicated when A is pressed to stop the chronograph, and the 1/20 second hand moves to the actual time. The hand returns to the "0" position when B is pressed and the chronograph is reset.
4. If B is pressed again after chronograph is reset, the 1/20 second hand changes to measure each second.